


REPEATER INTERFACE COMMUNICATIONS KIT (R\*I\*C\*K)

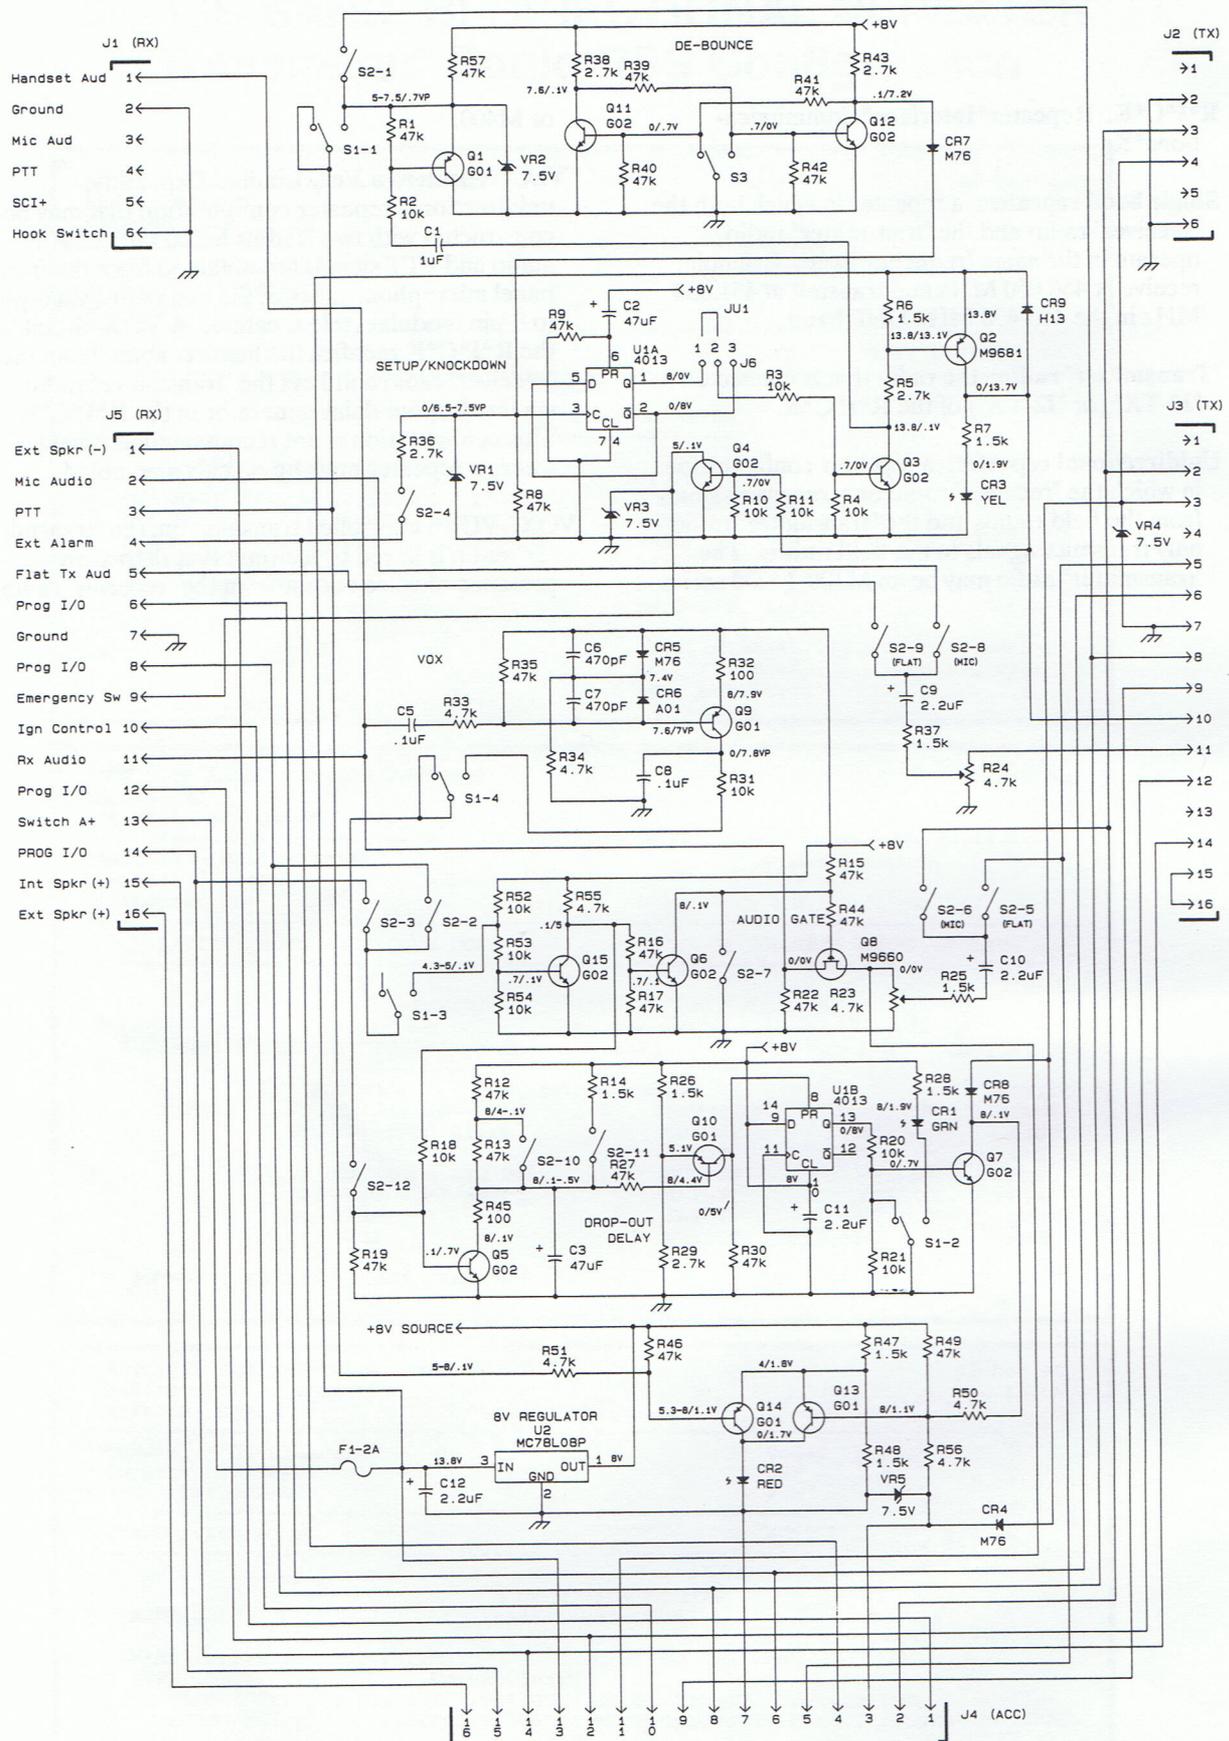

- NOTES:
1. Pin assignments for J1 and J2 are identical.
  2. Pin assignments for J3, J4 and J5 are identical.
  3. JU1-At power up: 1-2 for rptcr on/2-3 for rptcr off.
  4. All voltages are dc and measured with hi-z DMM.
  5. S1 and all sections of S2 are shown "OFF".
  6. Voltages shown are Inactive/Active state.  
"p" after a voltage means pulsed (not continuous).
  7. Measure voltages with RMI\*CK in normal operation with radios attached to J3-TX AND J5-RX. S1, "Repeater Enable", S2-4 and either S2-2 or S2-3 must be "ON". S2-12 must be "ON" to check VOX.